




Schallabsorptionsgrad nach DIN EN ISO 354: 2003

Akustik Vorhang AV13, einlagig

1,7-facher Faltenwurf bei 15 cm Wandabstand

Frequenz [Hz]	α_s
63	
80	
100	0,03
125	0,05
160	0,13
200	0,25
250	0,45
315	0,70
400	0,88
500	0,87
630	0,91
800	0,86
1000	0,91
1250	0,90
1600	0,89
2000	0,86
2500	0,87
3150	0,88
4000	0,87
5000	0,84
6300	
8000	

**Schallabsorber
Klasse C**
 $\alpha_w = 0,75$

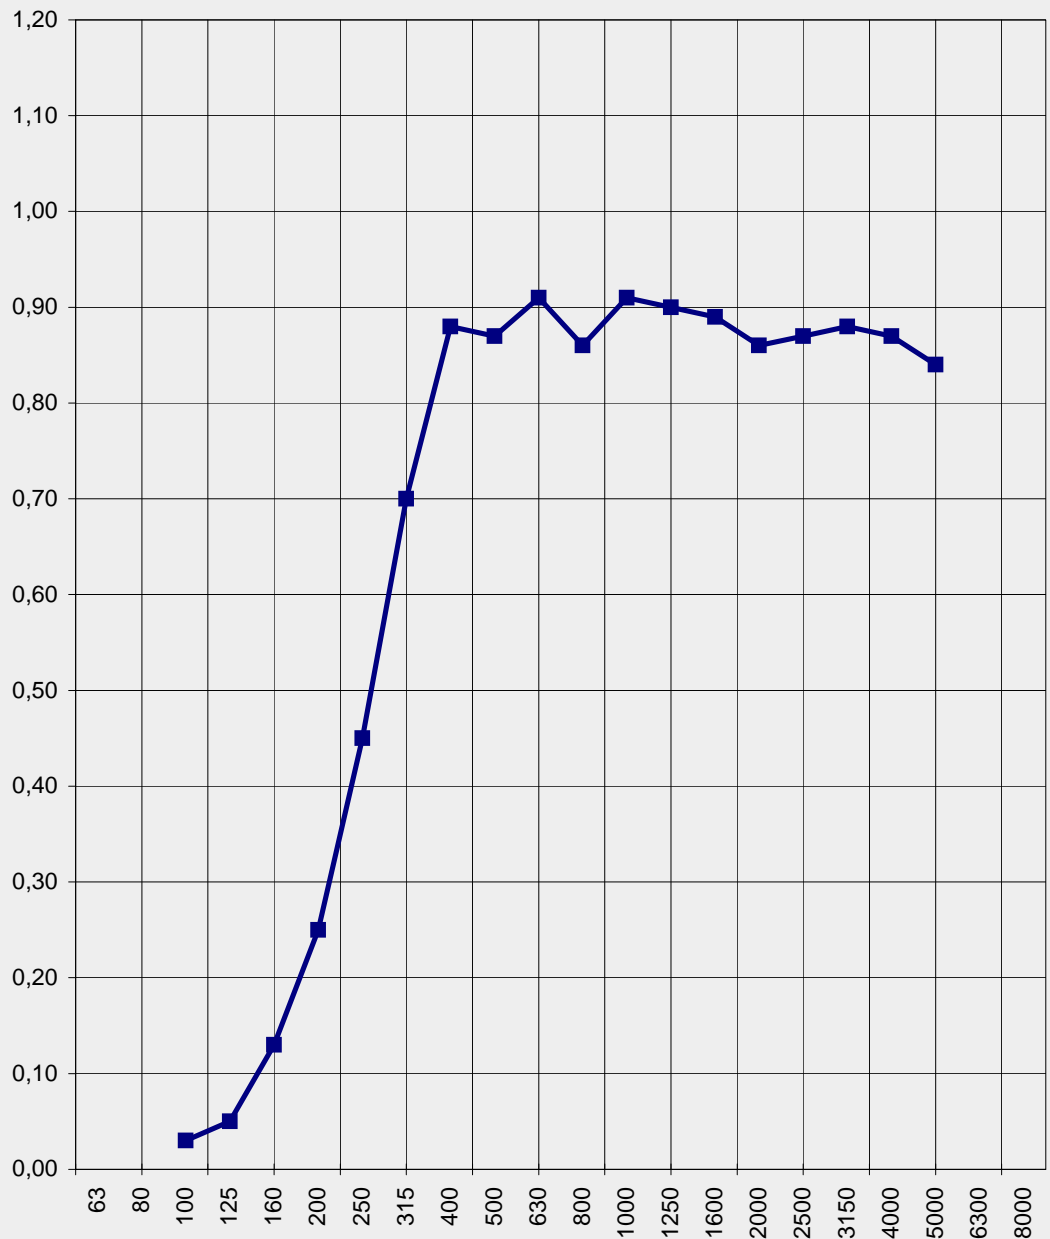

Datum: 23.07.2011




Schallabsorptionsgrad nach DIN EN ISO 354: 2003

Akustik Vorhang AV13, einlagig

1,7-facher Faltenwurf bei 15 cm Wandabstand

Frequenz [Hz]	α_s
63 Hz	
125 Hz	0,05
250 Hz	0,45
500 Hz	0,90
1,0 kHz	0,90
2,0 kHz	0,85
4,0 kHz	0,85

**Schallabsorber
Klasse C**
 $\alpha_w = 0,75$

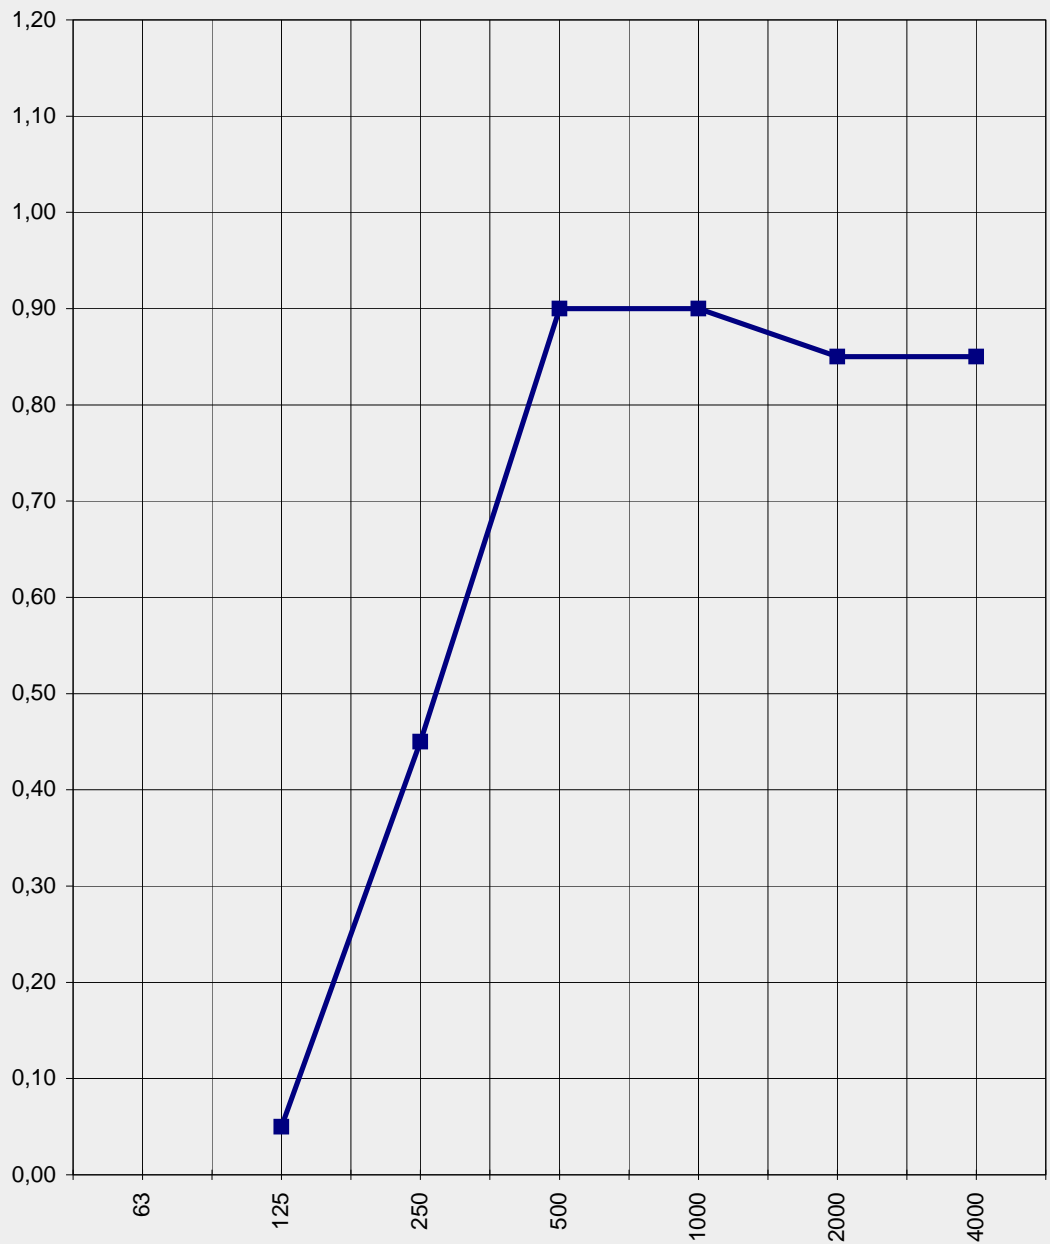

Datum: 23.07.2011