

# Sound Wall TW1

Sound absorbing movable wall for recording studios, office rooms, call center and many more



This movable studio wall is fitted on both sides with broad band absorbing material which is protected from damage by means of a covering fabric. This makes the surface totally „dry“ as nearly the entire incident sound is absor-

bed. This behaviour is ideal for all recordings for which the room reverberation is to be added later, as is the case for most recordings of speech and vocals. Due to the the robust construction and high quality visual design, this stu-


dio wall is also suitable for deployment in offices, call centres and many other applications. As we manufacture the sound walls in-house, custom designs are easily possible.

## Specifications TW1

**applications** Recording rooms, office rooms, call center

**dimensions** frame 100 x 207 x 11 cm  
ground plate 100 x 29 cm  
absorber surface 96 x 200 cm (each)  
or custom

**design** movable acoustic wall with four castors  
fabric according to colour card AT  
frame MDF solid coloured black  
sealed with clear varnish

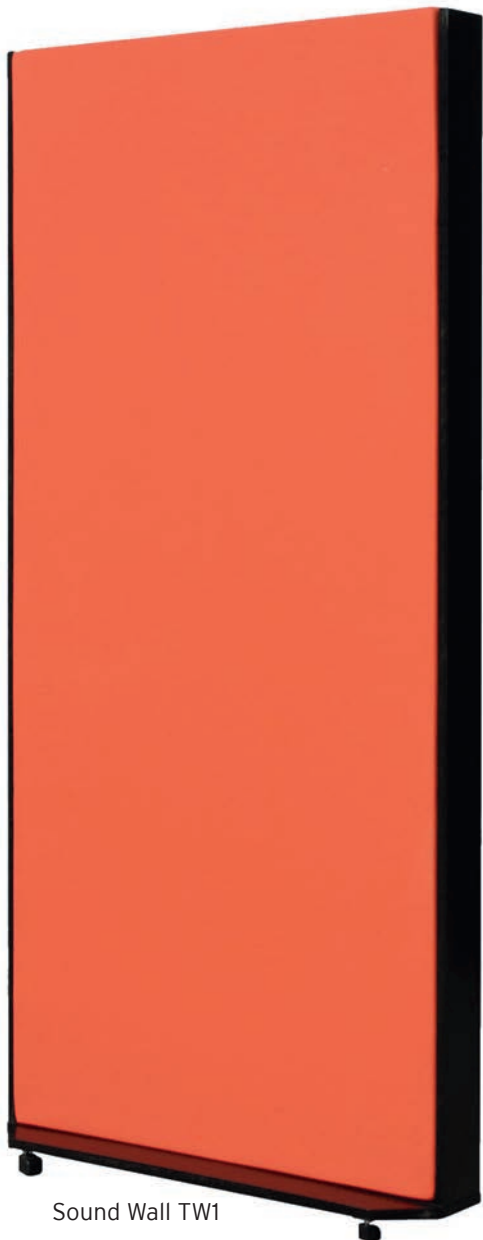

Sound Wall TW1



ground plate with four castors